



Cold cathode gauge IKR 050, coaxial, FPM- sealed, DN 25 ISO-KF

PFEIFFER ➤

IKR 050, coaxial




Illustration only

Cold cathode gauge IKR 050, coaxial, FPM-sealed, DN 25 ISO-KF

- Flange size DN 25 ISO-KF
- For general applications

IKR 050, coaxial

Dimensions

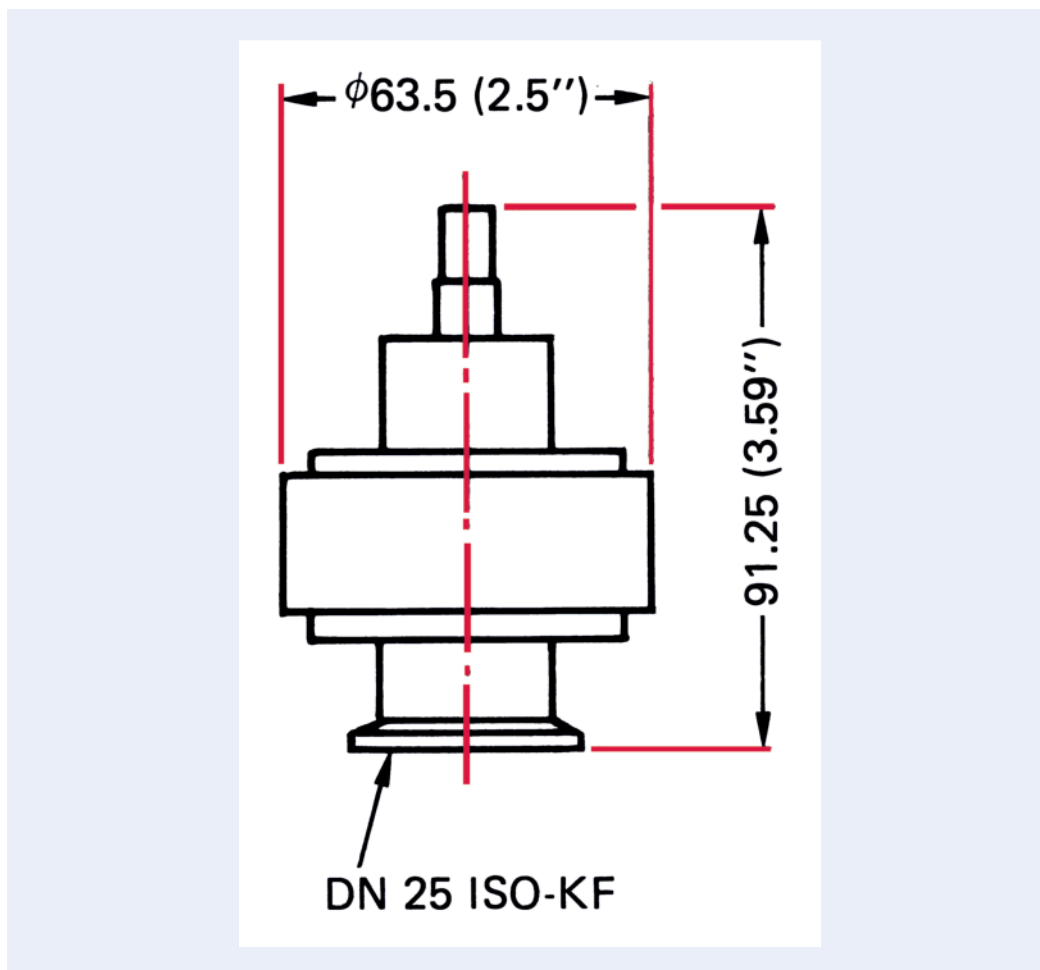

IKR 050, coaxial

Technical Data	Cold cathode gauge IKR 050, coaxial, FPM-sealed, DN 25 ISO-KF
Insulator	Al ₂ O ₃
Measuring range	$2 \cdot 10^{-9} - 5 \cdot 10^{-3}$ hPa
Flange, material	Stainless steel
Seal	FKM
Anode	130727
Ambient temperature	5 – 150 °C
Special feature	FPM sealed
Measuring method	Cold cathode
Weight	0.6 kg 1.32 lb
Connection flange	DN 25 ISO-KF
Weight	0.6 kg

Order number	Cold cathode gauge IKR 050, coaxial, FPM-sealed, DN 25 ISO-KF
Cold cathode gauge IKR 050, coaxial, FPM-sealed, DN 25 ISO-KF	PT R18 500

Accessories	Cold cathode gauge IKR 050, coaxial, FPM-sealed, DN 25 ISO-KF
Anode, complete for KR/PKR, FPM-sealed	BG510999-X
IKR ignition aid, 10 pieces	BN845995-T
Maintenance kit for IKR/PKR 250/251	BN846239-T
Repair kit for FPM-sealed cold cathode gauge consisting of anode, seal and three ignition aids	BN846252-T



Errors and/or changes excepted. - 9/30/2025

Are you looking for an optimum vacuum solution?

Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 