





MVP 015-4 DC, G 1/8"

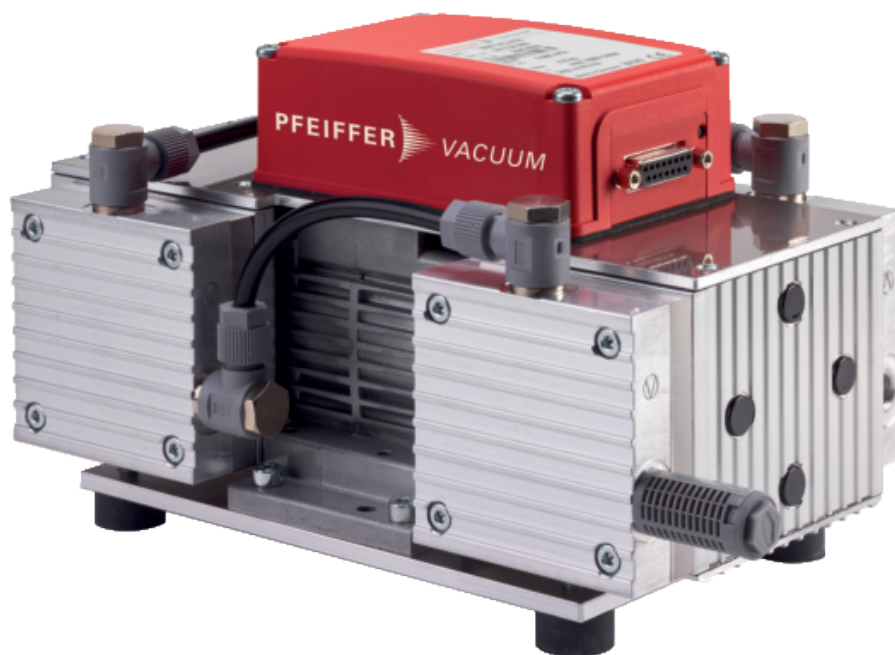


Similar Image

MVP 015-4 DC, G 1/8"

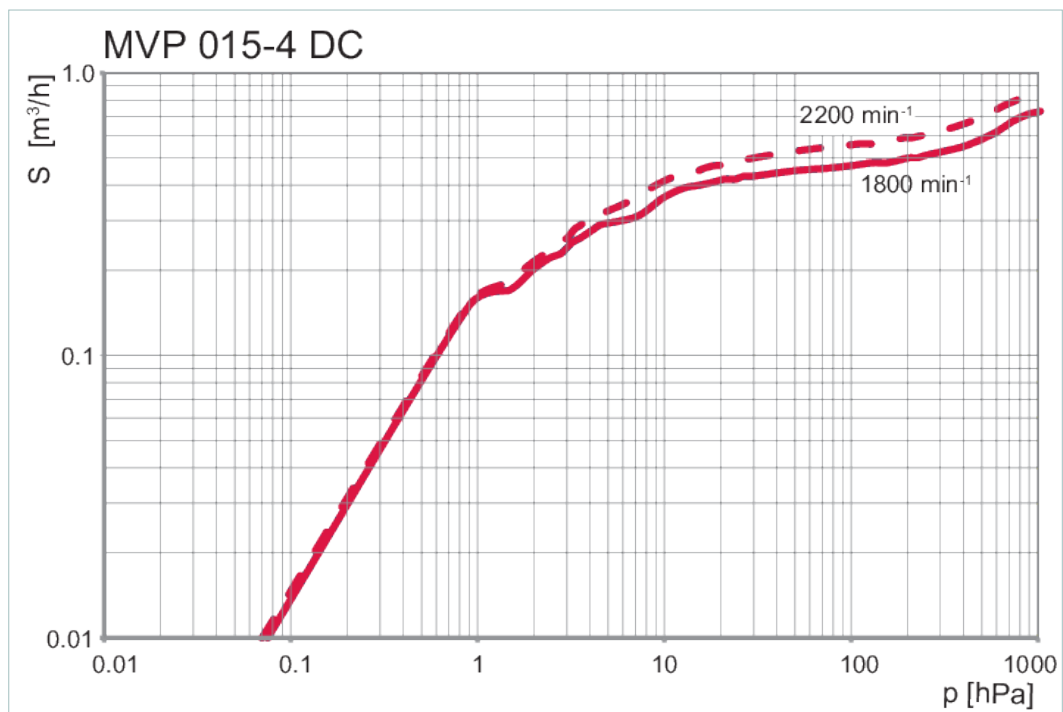

Dimensions

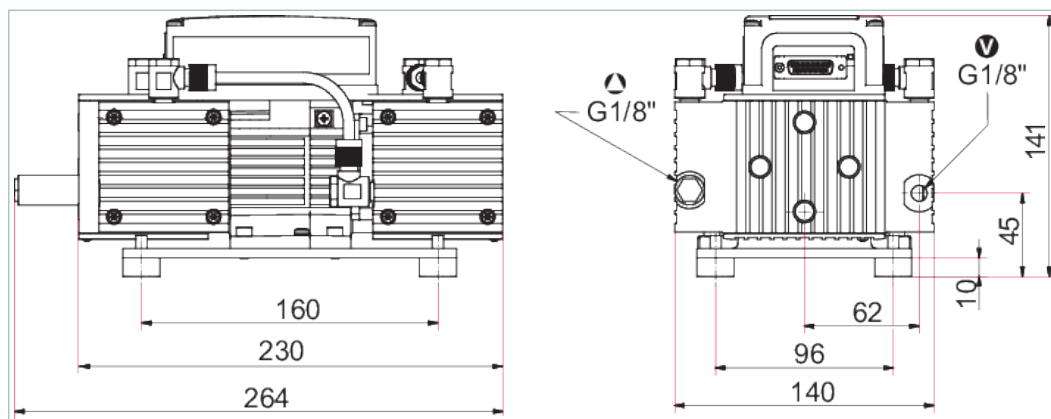

Technical Data	MVP 015-4 DC, G 1/8"
Ambient temperature	5-40 °C 41-104 °F 278-313 K
Cooling method, standard	Convection cooled
Dimensions (L x W x H)	264 x 140 x 141 mm 10.39 x 5.51 x 5.55 inch
Emission sound pressure level without gas ballast	≤ 50 dB(A)
Exhaust pressure, max.	1,100 hPa 825 Torr 1,100 mbar
Flange (in)	G 1/8"
Flange (out)	G 1/8" with silencer
Intake pressure max.	1,100 hPa 825 Torr 1,100 mbar
Interfaces	RS-485
Leak rate	≤ 5 · 10 ⁻⁴ Pa m³/s
Mains cable	No

Technical Data	MVP 015-4 DC, G 1/8"
Operating altitude, max.	2000 m
Protection category	IP20
Pumping speed, max.	0.75 m³/h
Rated current absorption	2.7 A
Rotation speed	500-2,200 rpm 500-2,200 min ⁻¹
Rotation speed max.	2,200 rpm 2,200 min ⁻¹
Rotation speed min.	500 rpm 500 min ⁻¹
Temperature: Storage	5-40 °C 41-104 °F 278-313 K
Ultimate pressure without gas ballast	≤ 5 · 10 ⁻¹ hPa ≤ 3.75 · 10 ⁻¹ Torr ≤ 5 · 10 ⁻¹ mbar
Voltage: Range	±10 %
Weight: with motor	4.4 kg 9.7 lb

Order number	
MVP 015-4 DC	PK T05 068

Accessories	
Accessories Diaphragm pumps	
TPS 180, mains pack for wall/standard rail fitting	PM 061 341 -T
Mains cable 115 / 230 V without plug, with IEC 320/C13 socket (straight), 3 m	P 4564 309 ZH
Screw-in flange DN 16 ISO-KF / G 1/8" incl. seal	PK 050 108 -T
Push-in T-fitting G 1/8"	P 4131 030 E
Connection cable MVP-TC-TPS, 3 m	PE 100 013 -T
Hose connection DN 6x1000 mm with straight fitting G 1/8" and G 1/4" including seal	P 0920 817 E
Hose connection DN 6x400 mm with straight fitting G 1/8" and G 1/4" including seal	P 0920 739 E
Hose DN 6; (ø 8/6 mm) polyethylene	P 0991 939
Mains pack 19" rack module 3HU with front panel	
TPS 181, mains pack 19" rack module 3HU	PM 061 345 -T
DCU with integrated power supply	
DCU 180, Display control unit incl. power supply	PM C01 821
Control and display units	
DCU 002, Display Control Unit	PM 061 348 -T
HPU 001, Handheld Programming Unit	PM 051 510 -T
Mains cables	
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE
Connection cables	
Connection cable with RS-485 interface for TC 110/120 to power supply	PM 061 350 -T
RS-485 accessories	
USB converter to RS-485 interface	PM 061 207 -T
Y-Connector M12 to RS-485	P 4723 010
Accessories RS-485	
Interface cable, M12 m straight/M12 m straight, 3 m	PM 061 283 -T

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

